

Request For Bid: 2020 Road Repair Project Linne Community Service District

Sealed Bid Return Date to LCSD: 9/04/2020, 5pm
To: LCSD - Ms. Conny Gut, 6270 Windmill Place, Paso Robles, CA 93446
or via email to cgut805@gmail.com

Linne Community Services District (LCSD) is soliciting bids for our 2020 roads project. The project consists of a combination of many items around the valley roads (see attached visual map and table). Dimensions are approximate and should be verified for proposal. Final work package will be determined when bids are received and reviewed - modifications to work may be required (with bid revisions as appropriate) depending upon final LCSD approved budget approval. Only sealed bids will be considered and they will be opened as a combined package at the next LCSD board meeting (date to be determined).

LCSD packages road repair work annually to allow for most effective spending of funds. Packaged construction work in excess of \$25,000 will require public, competitive sealed bidding. Request for Proposals are prepared by the LCSD board and are available and communicated to interested parties. Before submitting its bid proposal, a bidder should carefully review all submittals to confirm all bid requirements have been satisfied. The bid should be sealed to ensure fairness in the review process. An unsealed bid may be deemed non-responsive for failing to meet the "sealed bid" requirement. The public, competitive sealed bid requirement is waived in the case of emergency repairs where public access and safety require immediate action. The bid must be delivered on time to the exact location listed specified when the bid is requested from the vendor. All submitted bids meeting delivery requirements will be reviewed at the next LCSD board meeting. The contracts will be reviewed and awarded to lowest responsible bidder who submits a proposal that most closely meets the District's specifications with the consideration of price and delivery dates. The District reserves the right to reject all proposals; and request new bids if the existing responses do not meet the District's specifications with the consideration of price and delivery dates. (LCSD purchasing code 3410, 3500, Public Contracts Code section 20682)

Bid Package Requirement

- * Provide subtotal cost or cost/sq-ft for 2" Overlay work - total 14876sf $\$3^{00} / \text{sq. ft.} \#44,628^{00}$
- * Provide subtotal cost or cost/sq-ft for 4" Patch work - total 804sf $\$12^{00} / \text{sq. ft.} \#9,648^{00}$
- * Provide subtotal cost for chip seal - assume 10,000sq-ft $49\& / \text{sq. ft.} \#4900^{00}$
- * Provide estimated start date/window and project time.

Just let me know when you want to start.

Please contact Mr. Gary Hubbard 805-238-7312 or 805-239-0553 to schedule project visit & review. Thank you.

LCSD Board

[Signature] 9/4/20

Definitions


OL	Overlay	Sweep and clean existing AC road surface, apply tack oil, apply 2" average asphalt (as per specification) overlaid on top of clean asphalt base, compact
PA	Patch	a) Excavate and remove spoils of existing soil or damaged asphalt to sub-grade, b) Place 4" of AC (as per specifications), compact and level to existing AC grade - maximum 2" lift per compaction.
CS	Chip Seal	Brush to clean - apply 0.45gal/sy CRSII oil - apply 3/8" chip rock at 30#/sy

Conny, Usually we clean the bank on Stage Coach Rd., usually we complete this task for \$2500⁰⁰.

Thank-you

Linne Community Service District
"Dresser Ranch"

2020 Roadwork Request for Bid

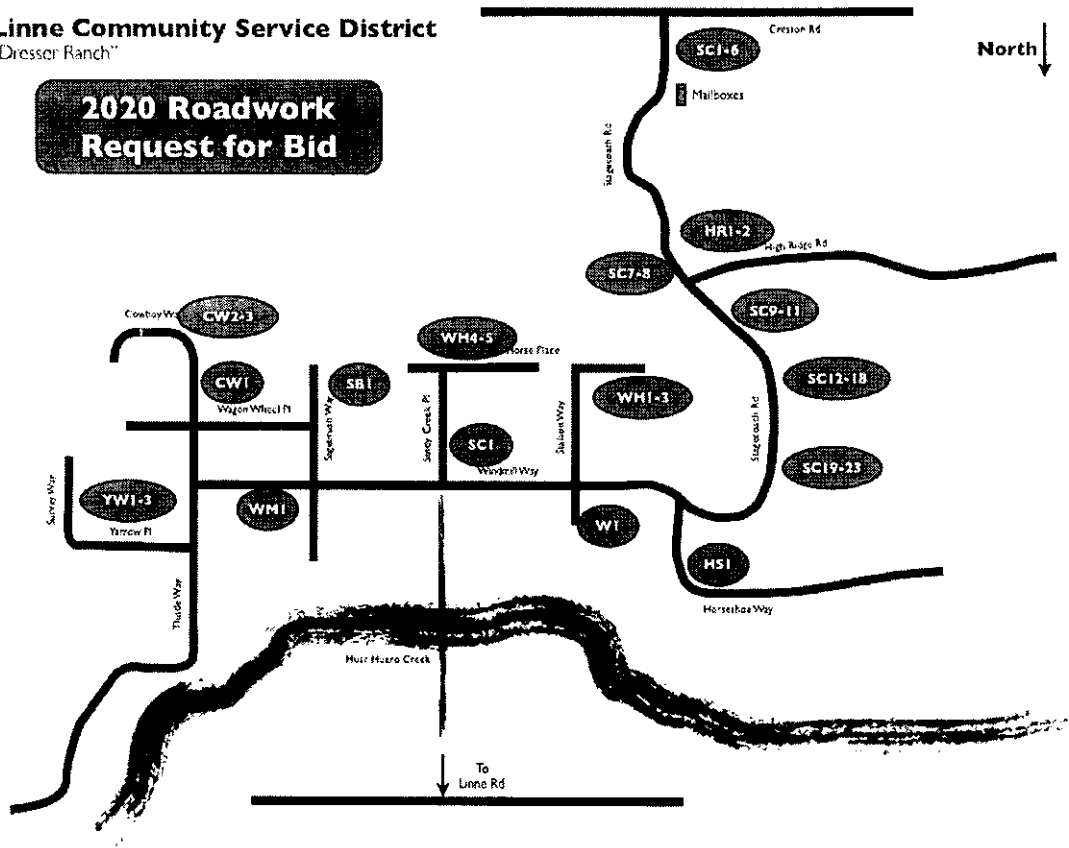

	Item	Type	L	W	
Stagecoach Rd	SC1	OL	15	30	at corner of creston - triangle shape
	SC2	OL	5	48	
	SC3	OL	3	8	
	SC4	OL	2	2	
	SC5	OL	3	21	
	SC6	OL	4	15	
	SC7	OL	8	8	near high ridge and stage coach
	SC8	OL	8	16	
	SC9	OL	12	117	14'width S-end, 10'width N-end
	SC10	OL	16	51	
	SC11	OL	3	12	approx halfway down stagecoach toward windmi
	SC12	OL	9	51	
	SC13	OL	10	78	
	SC14	OL	10	39	
	SC15	OL	10	138	
	SC16	OL	21	114	
	SC17	OL	20	114	
	SC18	OL	10	30	
	SC19	OL	6	57	across from 2520 stagecoach

	SC20	OL	3	57	
	SC21	OL	6	36	
	SC22	OL	6	45	
	SC23	OL	12	78	
High Ridge	HR1	OL	5	21	
	HR2	OL	5	33	
Horseshoe Way	HS1	PA	4	72	cutout of material to be filled in on ditch E-side of sandy creek just south of windmill
Wrangler	W1	OL	6	6	
Wild Horse Rd	WH1	PA	4	60	
	WH2	PA	6	84	
	WH3	PA	3	4	
	WH4	OL	4	10	next to 6270 address
	WH5	OL	5	39	
Windmill Way	WW1	OL	5	72	
Cowboy/Thistle Way	CW1	OL	3	36	
	CW2	OL	4	36	
	CW3	OL	3	15	
Yarrow Way	YW1	OL	3	24	
	YW2	OL	5	30	
	YW3	OL	3	3	